



MARINE AUXILIARY DIESEL ENGINES



660 - 1370 kW (897 - 1863 ps)



# Call for Yanmar solutions









PRODUCT GUIDE	Model	6EY22LW, 6EY22ALW
	Code No.	0GE22-G00101

# **CONTENTS**


1. The Development Story
2. Development Concept and Policies
3. Engine Main Specifications and Generator Capacity
Engine Main Specifications
Generator Capacity
4. Structural Outline 4
External View 4
Sectional View
5. Raising Life Cycle Value (L.C.V.)
The Low Sac Fuel Injection Valve
Laser Alloyed Piston Ring Grooves
Intake and Exhaust Valve Stem Seals
<ul> <li>Automatic Back-Washing Lubricating Oil Strainer</li> </ul>
<ul> <li>Easy Maintenance</li></ul>
Piping and Wiring Joints
6. Harmony with the Environment
6.1 ASSIGN Combustion System ······15
Staggered Layout Multi-Hole Nozzle15
● Air Flow Motion
6.2 High Pressure Miller Cycle System ······16
• Miller Type Cam16
High Pressure Ratio Turbocharger17
• Relation between Specific Fuel Consumption and NOx Emission
6.3 Corresponding to Low Sulfur Fuels (Decrease SOx)
• Fuel Injection Pump Plunger Coating
<ul> <li>Fuel Injection Pump Drive System</li></ul>
7. Comparison of Outside Dimension and Maintenance Interval
8. Development, Manufacturing and Service Network

# 1. The Development Story

Since its establishment, Yanmar has been dedicated to developing its own new technologies and products in pursuit of resource and energy efficiency. Yanmar has pursued the continuous improvement of "Life Cycle Value" by developing products that embody reliability, durability and low cost operation, because auxiliary engines are relied upon throughout the long life of a ship.


However, as atmospheric pollution damages the environment and global warming has begun to effect the ecosystem, protecting the environment has become a vital global issue. Yanmar was founded with the spirit of "grateful to serve for a better world". In order to realize that hope, Yanmar is developing engines in harmony with the environment by reducing NOx, CO<sub>2</sub>, SOx, and other emissions and reducing the use of environmentally damaging substances.


The concepts behind the 6EY22 engine of "Improving Life Cycle Value" and "Harmony with the Environment" deliver customer satisfaction by offering solutions for both economy and environmental protection.

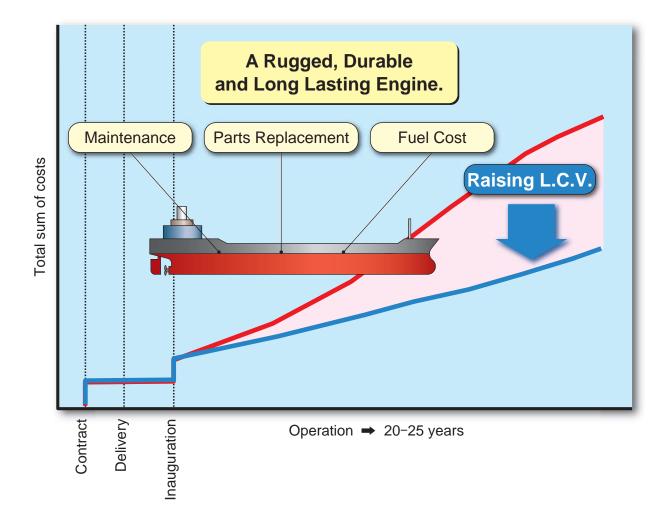

# 2. Development Concept and Policies

## Raising L.C.V. (Life Cycle Value) for Customers

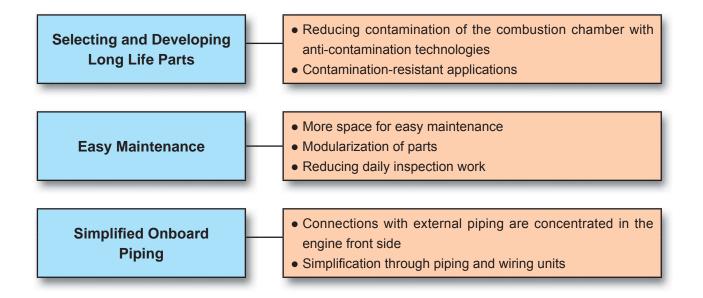

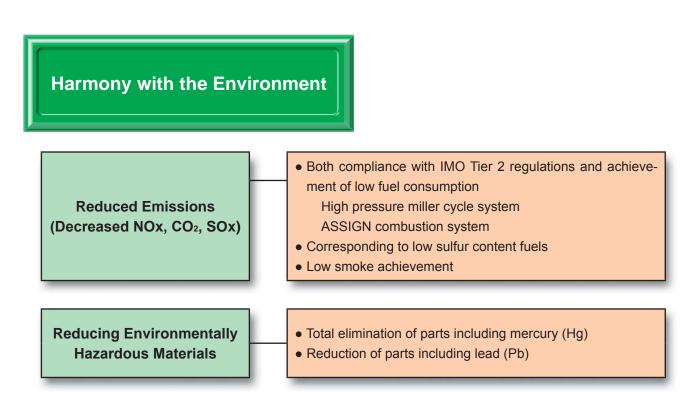

2

# 3. Engine Main Specifications and Generator Capacity

## **Engine Main Specifications**

Engine Model		6EY22LW	6EY22ALW
Rated Power	kW	660-1080 880-1370	
Rated Speed	min <sup>-1</sup>	720/750	900/1000
No. of Cylinders	-	6	
Bore x Stroke	mm	220×320	
Mean Piston Speed	m/s	7.68/8.00	9.60/10.67
Mean Effective Pressure	MPa	1.45-2.47	1.45-2.50
Max. Combustion Pressure	MPa	20.0	
Applicable Generator Capacity	oplicable Generator Capacity kWe		800-1300


# Generator Capacity

Pole	Speed min <sup>-1</sup>		Generator Capacity (kWe)				
	min <sup>-1</sup>	4(	00	600	800	1000	1200
(60Hz) 10 (50Hz) 8	720 750	360	560 SEY18LW	6E	Y22LW	1020	
(60Hz) 8 (50Hz) 6	900 1000	400	6EY1	750 8ALW		6EY22AL	1300 W


# 4. Structural Outline

## **External View**


#### (Operation side)

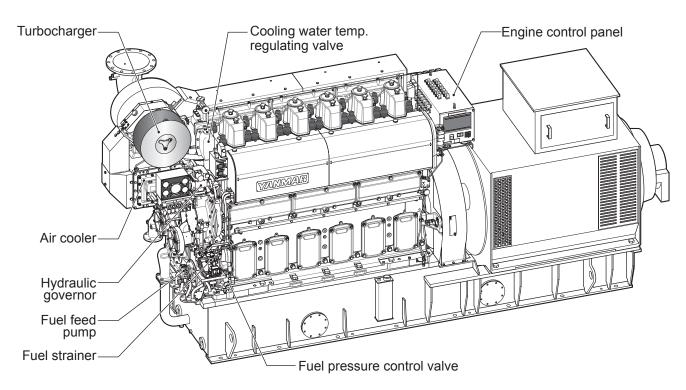

#### (Non-operation side)

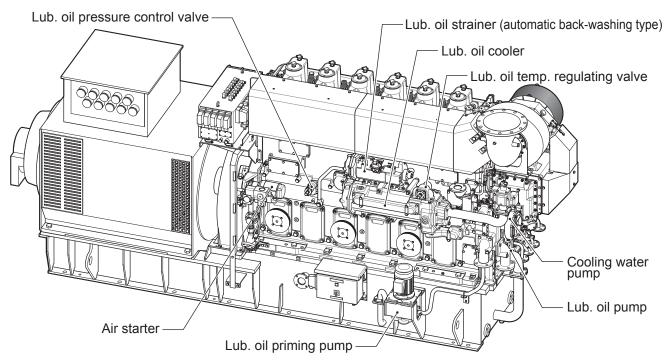


#### **Sectional View**

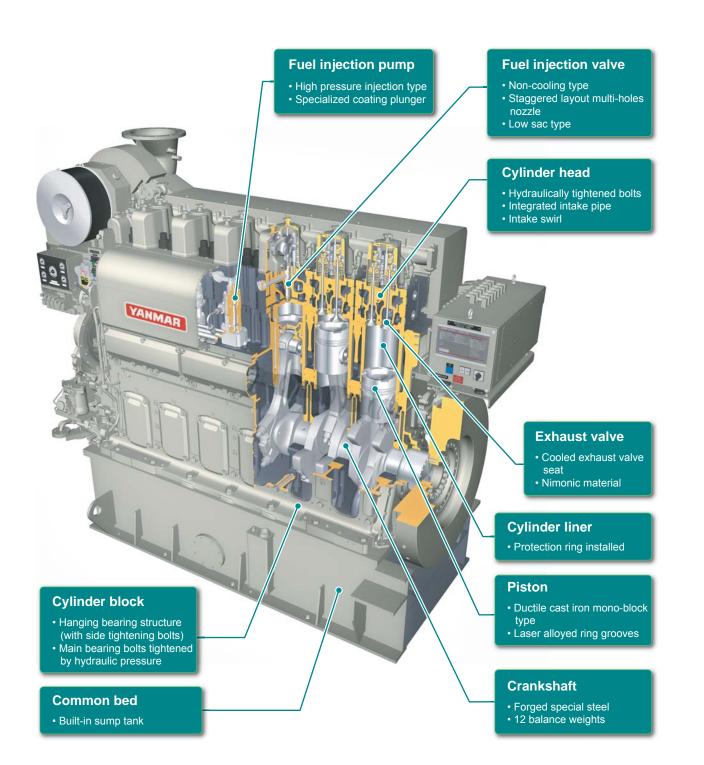

# 5. Raising Life Cycle Value (L.C.V.)

Along with performance (environmental), Life Cycle Value (L.C.V.) is one of the important engine characteristics. L.C.V. represents reliability (lower life costs) and easy maintenance throughout the life of the engine.

This engine offers greater reliability thanks to the combination of extremely thorough control of contamination in the combustion chamber and lub. oil, and longer maintenance intervals. Manhours are reduced because of engine disassembly and reassembly and also onboard outfitting works have been simplified.

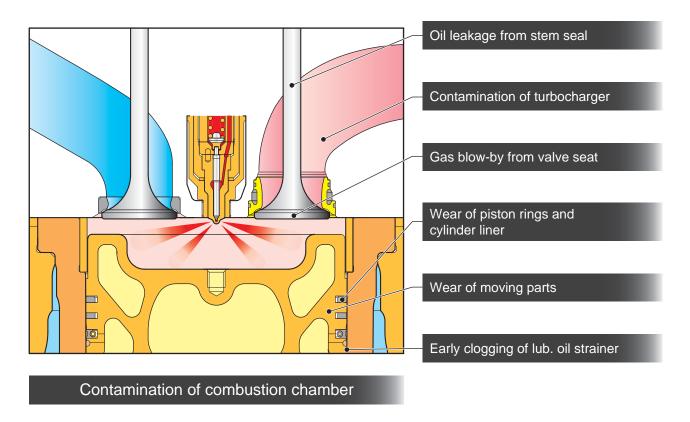


#### Contamination of lub. oil


#### The Low Sac Fuel Injection Valve

The volume of the sac at the tip of the fuel injection valve is minimized. Injection is sharper and post injection dripping is restrained, which eliminates contamination from unburned fuel. Nitriding treatment of the outside of the fuel valve enhances heat resistance and durability against corrosion for longer service life.


In addition, valve opening pressure has been increased up to approx. 30%. It improves atomization of the injected fuel and reduced smoke density during low load operation.

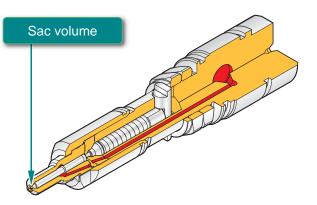


#### The effect of low sac fuel valves

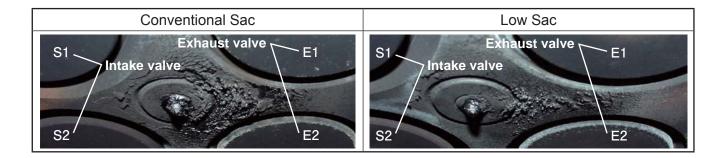

#### The effect of valve opening pressure (Heavy fuel oil (H.F.O.) operation, engine load 10%)

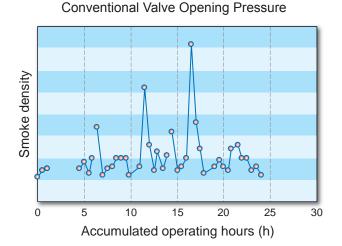

Increased Valve Opening Pressure

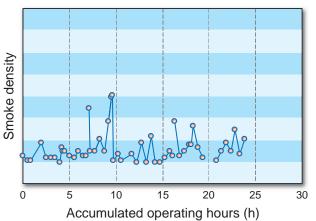


#### Laser Alloyed Piston Ring Grooves

• The piston is a nodular thin wall design with excellent high temperature resistance and uses graphite cast iron. Laser alloying is used on the bottom of the top ring groove for minimal wear even when using H.F.O.


Minimizing of thermal expansion allows for a smaller piston skirt. This improves stability and reduces lub. oil consumption.

• This design provides uniform and sufficient cooling of the outer liner up to the top ring. By controlling the temperature of the combustion chamber wall, it also prevents wear of the rings.

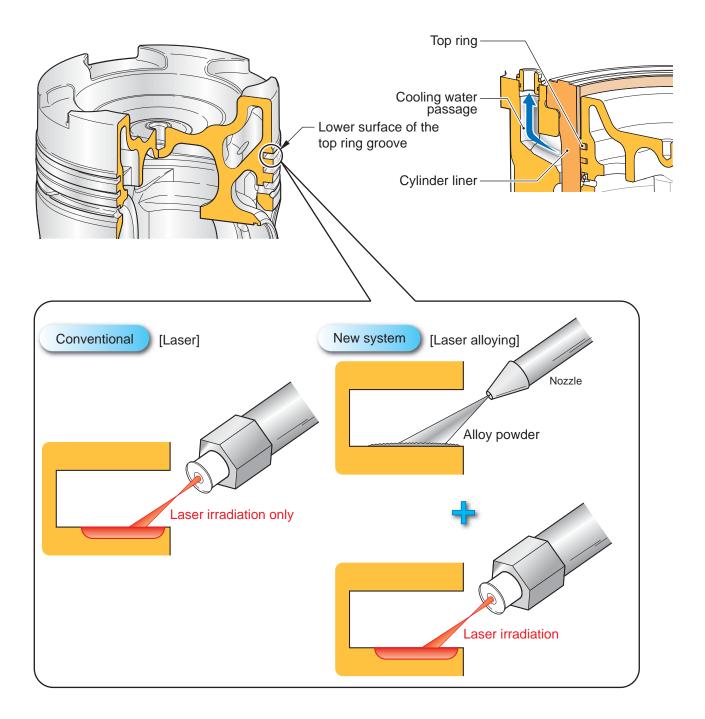

#### Intake and Exhaust Valve Stem Seals

This structure is designed for dependability even when using H.F.O. The exhaust valve seat is a cooled type and the exhaust valve is made of nimonic alloy. To reduce contamination, seals have a back pressure lip configuration on the intake and exhaust valves to ensure a proper supply of lub. oil without being affected by the boost pressure or misalignment of the stem.

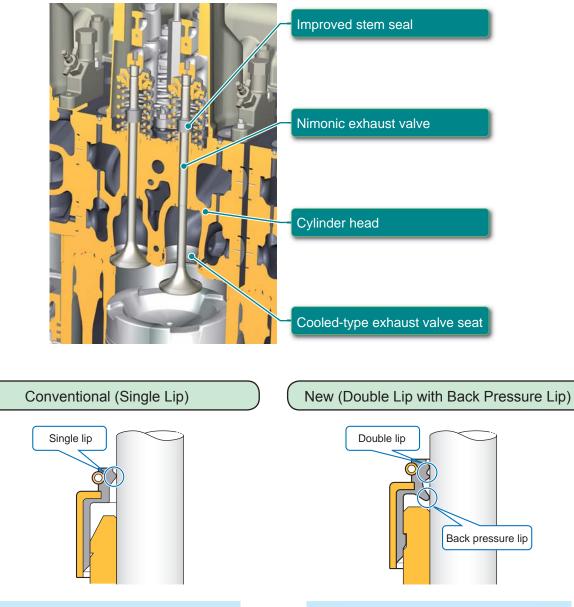







#### Automatic Back-Washing Lubricating Oil Strainer

The constant automatic back washing of the filter element allows clogging of the filter element to be controlled over the long period. The filter element has an accuracy of 30µm, depending on the turbo-charger, and strainer is identical for both the engine and the turbocharger.

The oil that has been flushed out through automatic back-washing is then cleaned by the overflow system.

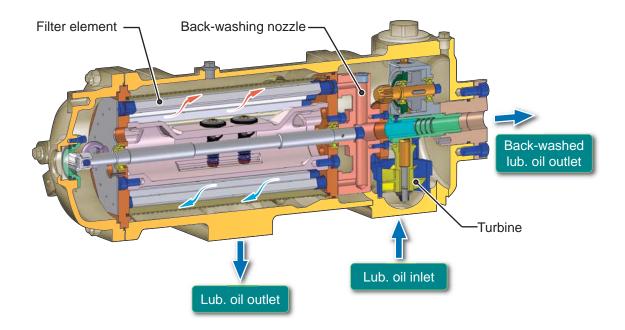


#### Lubricating Oil Purification System (Overflow System)

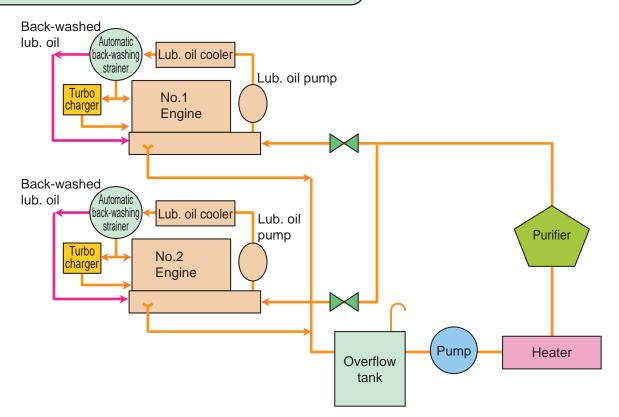


#### **Easy Maintenance**

The connecting rod, main bearing bolts and cylinder bolts are tightened hydraulically. Ample space is available for maintenance because the layout of equipments has been optimized, so the engine is also designed for easy overhaul. The air cooler and lub. oil system parts are constructed in modular units for compactness and a reduced number of parts to maintain.

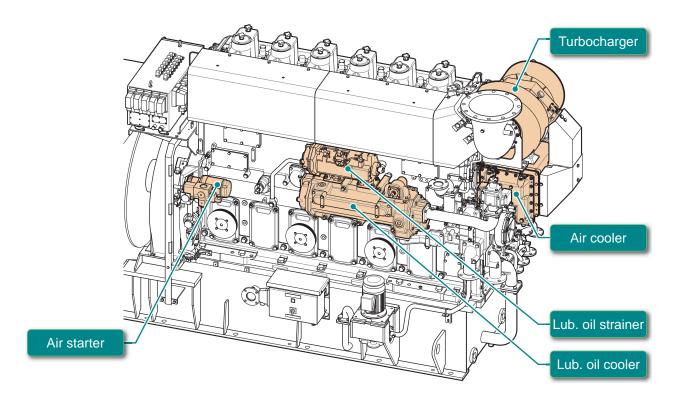


Modular construction of the turbocharger and air cooler Modular construction of the lub. oil system

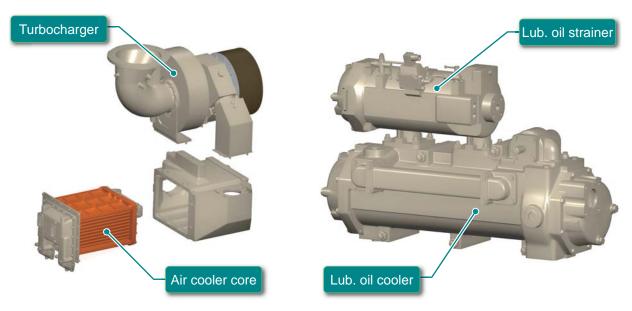


#### **Piping and Wiring Joints**

Piping joints are concentrated on the front side of the engine. Mixed freshwater cooling system improves ease of installation and simplifies piping layout onboard the ship.

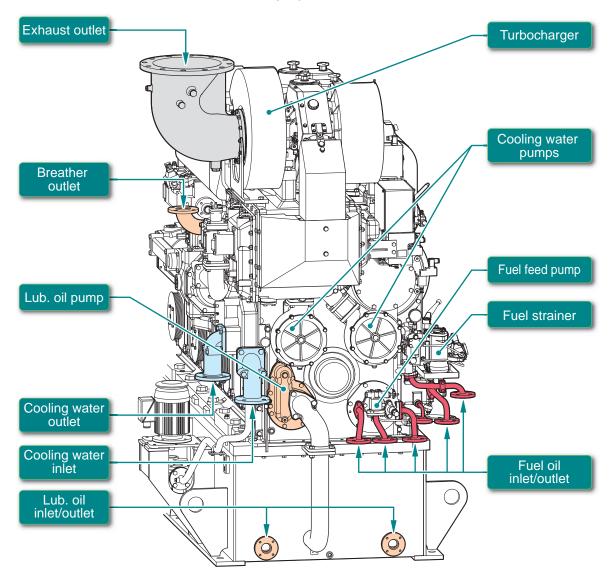

Mixed freshwater cooling system

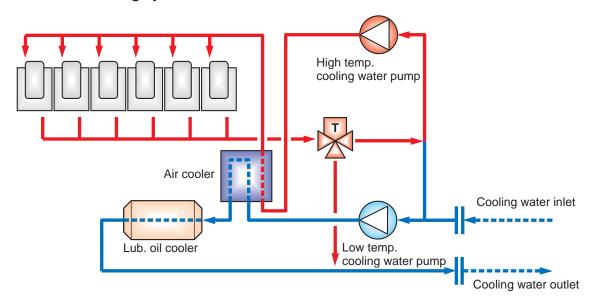


#### **Piping and Wiring Joints**


The engine control panel, local control panel, and lub. oil priming pump panel save the space usually had been used for control panel and make the wiring between the control panel and the engine unnecessary.

This feature improves safety by using each engine its own control panel. By installing a control panel and engine both made by Yanmar, quality assurance and service have also been improved.

#### (Operation side)

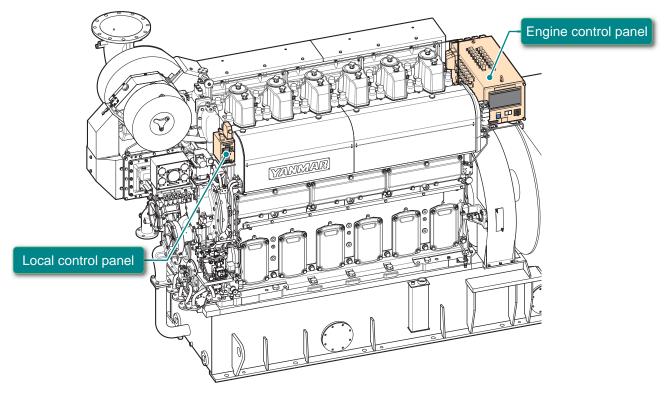


#### (Non-operation side)

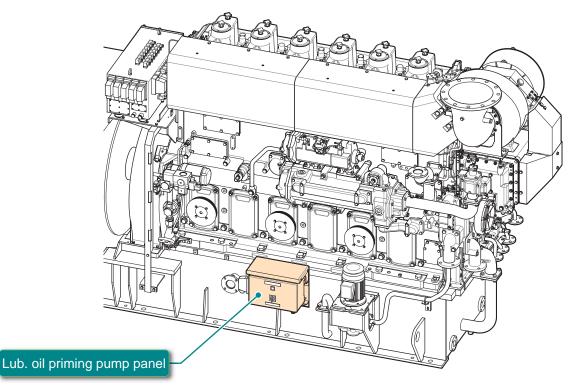


# 6. Harmony with the Environment

The pollution of the atmosphere by hazardous substances released from marine diesel engines has become a major global issue. The release of hazardous substances into the atmosphere by ships is regulated by the International Convention for the Prevention of Pollution from Ships (MARPOL 73/78). Annex VI: Prevention of Air Pollution from Ships was later passed in September 1997. As a result, the regulation of NOx emission levels began for marine diesel engines with a power of above 130 kW on vessels built on or after January 1, 2000. A further amendment was passed in October, 2008 and engines mounted in vessels built on or after January 1, 2011 face even stricter Tier II regulations. Technological solutions have been developed to overcome these regulatory challenges including engine technologies, supplementary technologies and post processing technologies. Yanmar is addressing the stricter IMO Tier II regulation NOx limits with improvements to combustion technologies of engine.

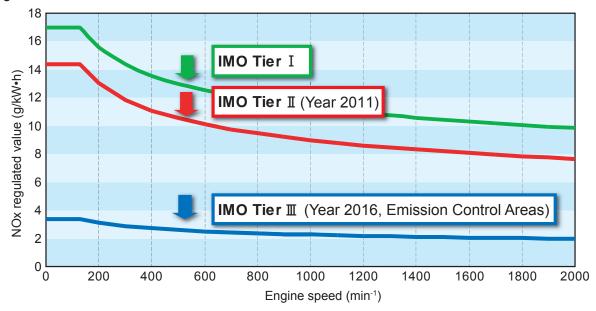

The regulations on NOx and SOx emissions continue to grow stricter. In special "Emission Control Areas" established by various countries, the sulphur content of fuel oil used must be 0.1% or below after 2015. The limit of 0.1% sulphur content in fuel oil has already been in effect within the EU for vessels anchoring within a bay or traversing inland waterways since January 1, 2010.

The 6EY22 has been modified to correspond to low sulfur (low viscosity, low lubricity) fuels through alterations to the fuel and other systems.

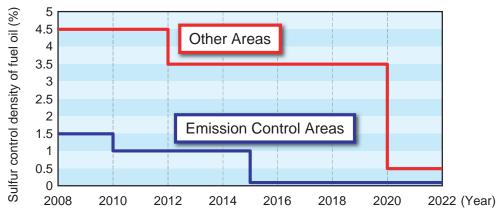

# 6.1 ASSIGN Combustion System

#### Staggered Layout Multi-Hole Nozzle


By staggering the layout and using multiple injection holes, this design achieves sufficient total injection area and improves air utilization.

# Conventional injection system Staggered layout injection system

#### **Air Flow Motion**

The optimally shaped air intake port generates a suitable swirl (vortex flow) in the combustion chamber as well as a squish in the compression stroke. This promotes fuel/air mixing, improving combustion efficiency.

#### Intake swirl and squish

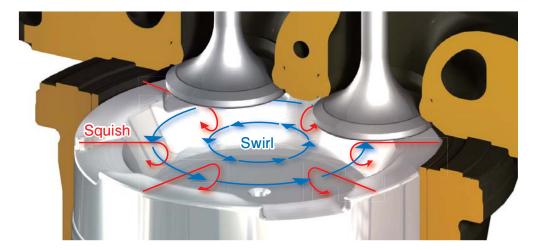


## 6.2 High Pressure Miller Cycle System

#### Miller Type Cam

#### ■Reduced air temperature before combustion → Decreasing NOx

With the miller type cam in its intake stroke, the miller cycle closes the intake valve earlier than conventional combustion. By finishing the intake stroke earlier, the intake air expands and temperature in the cylinder decreases, and by reducing air temperature before combustion in the next compression stroke, the NOx emission is reduced.

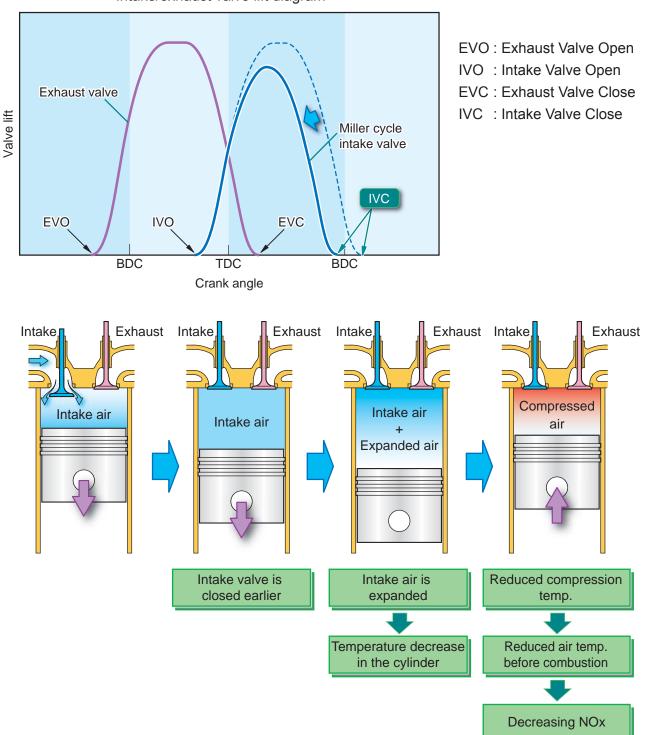


Intake/exhaust valve lift diagram


#### High Pressure Ratio Turbocharger

#### Recovery of pressure in the cylinder $\rightarrow$ Improved fuel consumption

Using the method of finishing the intake stroke earlier alone decreases the air quantity charged in the cylinder, resulting in decreasing the cylinder pressure and worsening the specific fuel consumption. Increasing the intake pressure by high pressure ratio turbocharger during the short intake stroke ensures the quantity of charged air and fixes the cylinder pressure to restrain the increase of the specific fuel consumption.

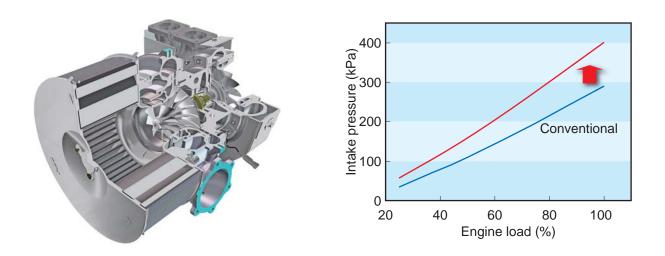


**Relation between Specific Fuel Consumption and NOx Emission** 

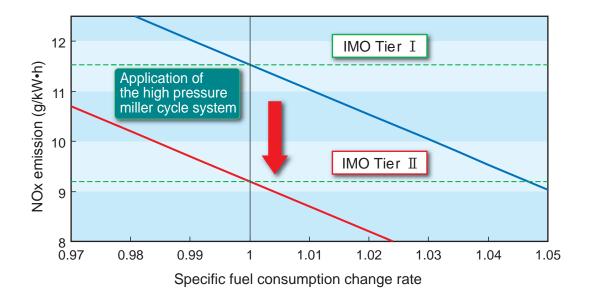

# 6.3 Corresponding to Low Sulfur Fuels (Decrease SOx)

#### **Fuel Injection Pump Plunger Coating**

The clearance of plunger and barrel for fuel injection pump has been revised to reduce the amount of fuel leakage as well as to improve sticking resistance when using low sulfur fuel (low viscosity), the plunger is coated with special coating (DLC: Diamond-Like Carbon).

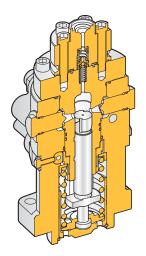


#### Fuel injection unit test result

Fuel used	: Kerosene
Kinematic viscosity	: 1.371mm <sup>2</sup> /s at 30°C
Sulfur content	: < 0.01%
HFRR	: 744
Operating hours	: 100h



#### **Fuel Injection Pump Drive System**


PF type, separate drive equipment, is adopted for fuel pump. A cover is provided on the upper part of roller tappet to ensure discharging outside of leaked fuel from the clearance of plunger and barrel to prevent the mixture of fuel into the cylinder.

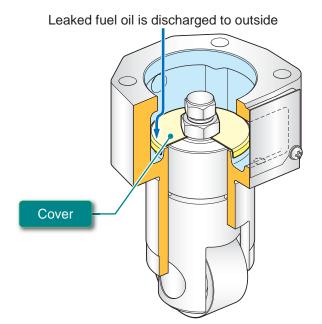

#### **Protection Ring**


A protection ring is equipped on the upper part of cylinder liner.

When the low sulfur fuel is used concurrently with the high alkalinity value (Total Base Number: TBN) lub. oil, additives (calcium carbonate) in the lub. oil adhere on the high temperature parts along with carbon residue. The residue adhered on the outside circumference of the piston top part trims the liner inner wall, which may cause scuffing and the increase of lub. oil consumption. The protection ring prevents sedimentation of residues on the outside circumference of the piston top part and cylinder liner wear.

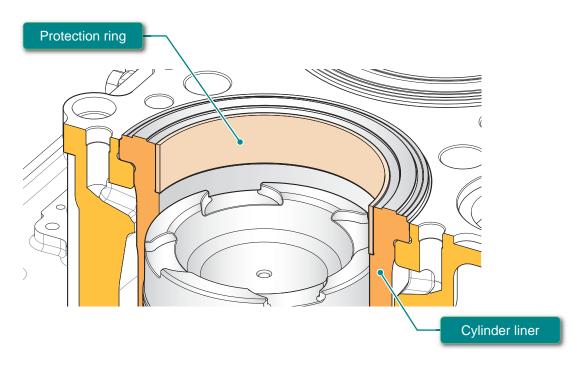

# 7. Comparison of Outside Dimension and Maintenance Interval

#### Comparison of outside dimension (6EY22 and 8N21)

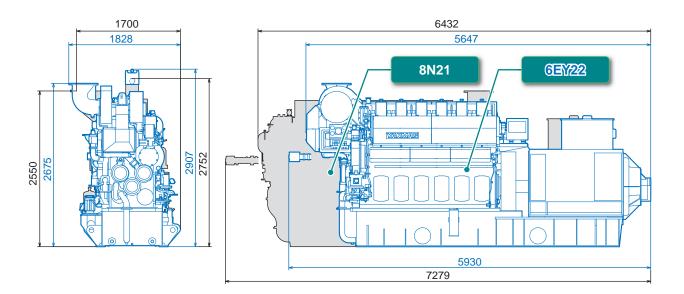

Note: 6EY22 is indicated by blue.

Engine Model	Total Mass (kg)
6EY22	18,100
8N21	20,200

#### Maintenance interval and expected service life (H.F.O.)

(Unit: h)

		(01111:11)
	Overhaul Interval	Expected Service Life
Fuel Injection Nozzle	2,000	8,000 (2 years)
Exhaust Valve		20,000-30,000 (5 years)
Intake Valve	8,000-12,000	20,000-30,000 (5 years)
Piston		40,000-60,000 (10 years)
Cylinder Liner		40,000-60,000 (10 years)
Crank Pin Bearing		20,000-30,000 (5 years)
Main Bearing		40,000-60,000 (10 years)
Turbocharger Bearing		20,000-30,000 (5 years)

## 8. Development, Manufacturing and Service Network

#### The Amagasaki Plant

Yanmar's Amagasaki Plant was founded in 1936 to produce the world's first small diesel engines. It subsequently converted mainly to the production of large diesel engines including marine propulsions and auxiliaries, industrial diesels and gas engines. The plant began the production of gas turbines in 1983.



Amagasaki Plant

#### Corresponding to the Shipping Classification

Yanmar has received the approval of voluntary inspection at factory from 10 Shipping Classification Organizations.


- LRS (Lloyd's Register of Shipping)
- ABS (American Bureau of Shipping)
- NK (Nippon Kaiji Kyokai)
- DNV (Det Norske Veritas)
- BV (Bureau Veritas)
- RINA (Registro Italiano Navale)
- GL (Germanischer Lloyd)
- CCS (China Classification Society)
- KR (Korean Register of Shipping)
- IRS (Indian Register of Shipping)



#### Research and Development

Based on its own engine technologies, Yanmar has been dedicated to developing not only in decrease of fuel consumption, but the first to developing environmental technologies including the reduction of vibration, noise and exhaust emissions.



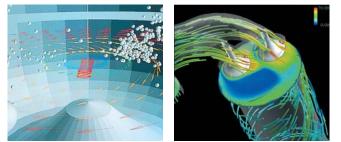

#### Production

With its own high-performance special purpose machines, state-of-the-art production facilities and advanced quality management system, Amagasaki Plant has been developing highperformance and high quality products with superior reliability and endurance.



#### Worldwide Service Network

Yanmar has implemented a worldwide after sales servicing with strengthened and enhanced after servicing. We do our best to respond to your request.



#### ASIA

#### JAPAN Country Code "81"

#### YANMAR CO., LTD.

- YANMAR (HEAD OFFICE)
- Umeda Gate Tower 1-9, Tsuruno-cho, Kita-ku, Osaka, Japan 530-8311
- YANMAR (TOKYO) EXPORT DEPT. MARINE 1-1, 2-chome, Yaesu, Chuo-ku, Tokyo, Japan 104-8486 Phone: 3-3275-4909 Fax: 3-3275-4969
- YANMAR (AMAGASAKI)
- 1-1, 1-chome, Nagasu Higashi-dori, Amagasaki, Hyogo, Japan 660-8585 Phone: 6-6489-8069 Fax: 6-6489-1082 • QUALITY ASSURANCE DEPT.
- QUALITY ASSURANCE DEPT. Phone: 6-6489-8017 Fax: 6-6488-4009

#### YANMAR ENGINEERING CO., LTD.

- YANMAR ENGINEERING (HEAD OFFICE) 1-1, 1-chome, Nagasu Higashi-dori, Amagasaki,
- Hyogo, Japan 660-8585 • OVERSEAS ENGINEERING DIVISION.
- Phone: 6-6489-8048 Fax: 6-6481-6101

#### TAIWAN Country Code "886"

YANMAR ENGINEERING CO., LTD. TAIWAN BRANCH No.56, Yugangjung 2 Rd., Chienchen Dist, Kaohsiung, Taiwan

Phone: 7-815-4198 Fax: 7-815-3280

#### CHINA Country Code "86"

▲ YANMAR ENGINE (SHANGHAI) CO., LTD. 10F, E-Block Poly Plaza, No.18 Dongfang Road, Pudong Shanghai, China P.R.C 200120 Phone: 21-6880-5090 Fax: 21-6880-8090

HONG KONG Country Code "852" YANMAR ENGINEERING (HK) CO., LTD. Room 1208, C.C.Wu Building, 302-308 Hennessy Road, Wanchai, Hong Kong, China Phone: 2833-9032 Fax: 2904-7783

PHILIPPINES Country Code "63" YANMAR ENGINEERING CO., LTD. PHILIPPINES LIAISON OFFICE 6th Floor, YL Holdings Building, 115 V.A. Rufino Street Corner Salcedo Street, Legaspi Village 1229, Makati City, Philippines. Phone: 2-893-2880/4262 Fax: 2-893-4339

SINGAPORE Country Code "65"

YANMAR ASIA (SINGAPORE) CORPORATION PTE., LTD. (YASC)
4 Tuas Lane, Singapore 638613
Phone: 6861-4200 Fax: 6862-5189

INDIA Country Code "91" © YANMAR INDIA PRIVATE LTD. MUMBAI BRANCH 707, Real Tech Park, Sector 30/A, Vashi, Navi Mumbai Pin: 400 703 Maharashtra Phone: 22-3969-4400 Fax: 22-3969-4410

#### MIDDLE EAST

#### U.A.E. Country Code "971"

YANMAR ENGINEERING CO., LTD. DUBAI LIAISON OFFICE Gold&Diamond Park, Manufacturing office 3006, Ground Floor Building-3, Sheikh Zayed Road P.O Box 214831 Dubai, U.A.E. Phone: 4-341-8787 Fax: 4-341-8778

#### EUROPE

NETHERLANDS Country Code "31" D YANMAR EUROPE B.V. (YEU) Brugplein 11, 1332 BS Almere-de Vaart, Netherlands Phone: 36-5493200 Fax: 36-5493209

GREECE Country Code "30"

YANMAR ENGINEERING CO., LTD. GREECE LIAISON OFFICE 5th FL., 130 Sygrou Avenue., Athens, Greece Phone: 210-922-2481 Fax: 210-922-2484

#### NORTH, SOUTH AMERICA

#### U.S.A. Country Code "1"

SYANMAR AMERICA CORPORATION (YA) 101 International Parkway, Adairsville, GA30103, U.S.A. Phone: 770-877-9894 Fax: 770-877-9009

YANMAR AMERICA CORPORATION

NEW YORK BRANCH Parker Plaza 16F, 400 Kelby Street, Fort Lee, NJ 07024

U.S.A.


Phone: 201-592-8500 Fax: 201-592-8503

### PRODUCT GUIDE

6EY22LW, 6EY22ALW

1st edition: May 2010 2nd edition: July 2012

Issued by: YANMAR CO., LTD. Large Product Marketing Dept. Large Power Products Operations Division Edited by: YANMAR TECHNICAL SERVICE CO., LTD.

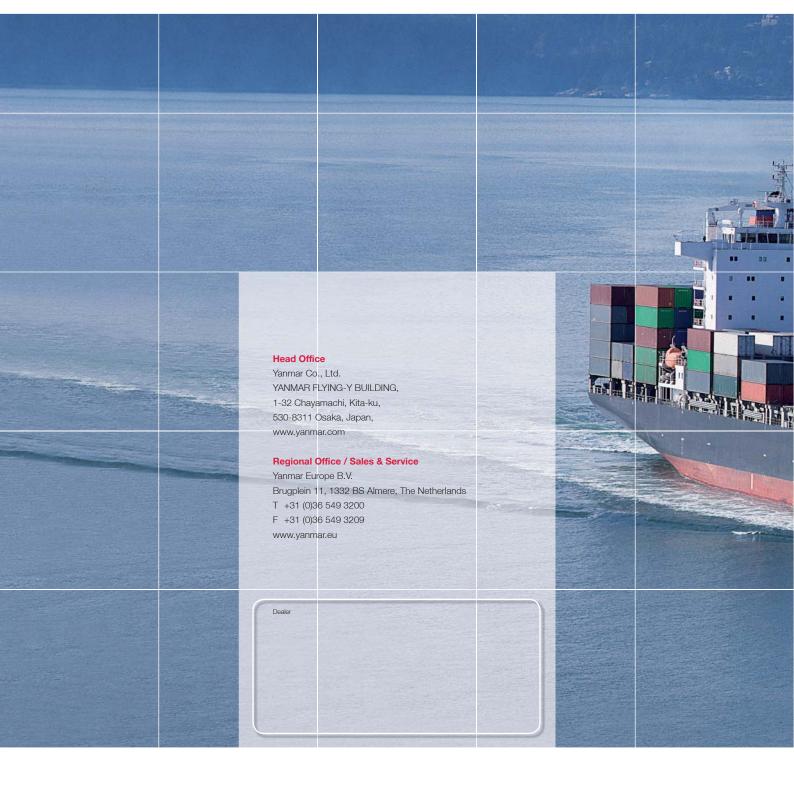

# www.yanmar.eu